


MODEL 2000
STANDARD CONFIGURATIONS AND OPTIONS

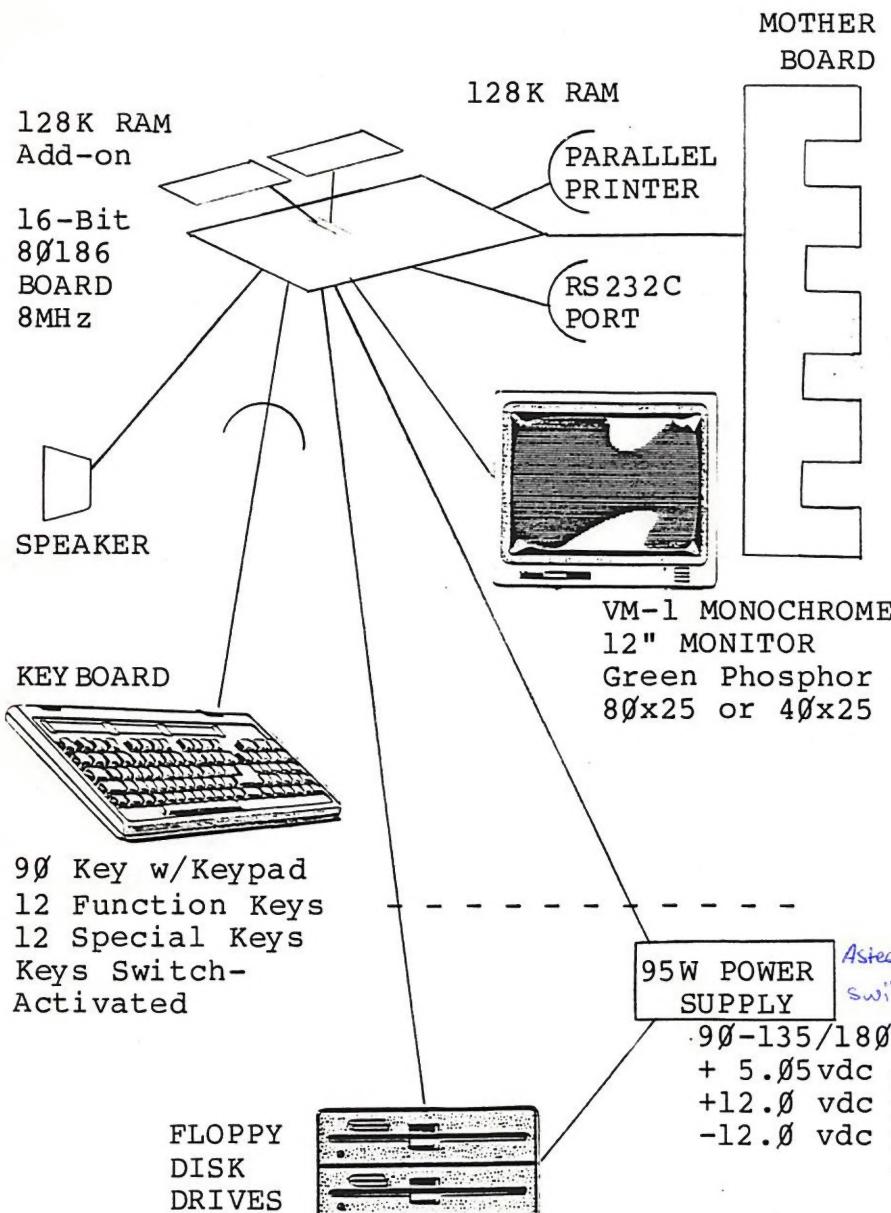

User-Installable Options

128K RAM BOARD/S (1-2)
128K Chip Kit to 256K
6665 64K chips

HIRES GRAPHICS BOARD
(640 x 400 res)

Monochrome
32KBytes PLANE 0
Color
32KBytes each,
PLANE 1-2
CM-1 14" Monitor

TV/JOYSTICK BOARD
(Lo-Res Option)
320 x 200 4 color
160 x 200 16 color
RF Modulator Ch. 3/4
2 joystick ports
Sound Generator

DIGI-.MOUSE/CLOCK BOARD
Digi-Mouse Cursor Control

MONITOR PEDESTAL

FLOOR STAND (with exten-
(sion cable for KB)

Astec switching

90-135/180-270VAC	13.25A
+ 5.05 vdc \pm 3%	2.1 A <i>RS232, Disc drives</i>
+12.0 vdc \pm 5%	0.2 A <i>for RS232</i>
-12.0 vdc \pm 8.3%	-25.0%

